

# ConAir® X

## Air Entraining Admixture for Concrete

### DESCRIPTION:

**ConAir® X** is an aqueous solution specially formulated for use as an air entraining admixture for concrete.

**ConAir® X** is manufactured under strict quality control standards to insure uniform performance at the job site

**ConAir® X** may be used wherever air entrainment is required by concrete specifications. It is particularly useful in:

- Commercial and residential concrete
- Mass concrete
- Mixes with high fly ash contents
- All concrete to be exposed to freezing and thawing conditions
- Concrete exposed to de-icing salts
- Concrete to be mixed for an extended period of time

### ADVANTAGES:

**ConAir® X** introduces millions of uniformly sized and spaced air voids throughout the concrete mixture. Concrete containing these tiny air bubbles has been proven far more resistant to freezing and thawing than plain concrete. **ConAir® X** in hardened concrete reduces permeability and enhances the resistance to surface deterioration caused by de-icing chemicals.

Concrete containing **ConAir® X** requires less water to achieve a given slump. **ConAir® X** can aid in concrete placing and finishing as the entrained air bubbles act as tiny “ball-bearings” to greatly improve the plasticity and workability of the concrete, making it easier to flow into forms or be pumped into place. Concrete mixes designed using **ConAir® X** can result in a reduction of segregation and honeycombing with smoother and more even finished surfaces. Reduced bleeding rate can be expected in air entrained mixes.



### DOSAGE RATE:

There is no standard addition rate for **ConAir® X**. The amount to be used will vary with local materials and intended concrete performance requirements. Typical **ConAir® X** addition rates range from 0.2 to 3.0 ounces per 100 pounds (13 to 195 ml per 100 kg) of cement.

### SPECIFICATIONS:


Conforms to ASTM C260 AASHTO M 154; CRD C 13 All other Federal and State specifications

### TECHNICAL NOTE:

**ConAir® X** does not contain calcium chloride or any chloride based components. It will not promote or contribute to corrosion of reinforcing steel in concrete. A reduced bleeding rate can be expected in air entrained concrete mixes.

### COMPATIBILITY:

**ConAir® X** is fully effective and compatible in concrete containing all types of portland cement, class C and F fly ash, microsilica, calcium chloride, fibers and approved water-reducing, accelerating and retarding admixtures. **ConAir® X** can be used in all white, colored, and architectural concrete. For best results, the air entrainment should be dispensed separately into the mix with the initial batch water or on damp, fine aggregate.

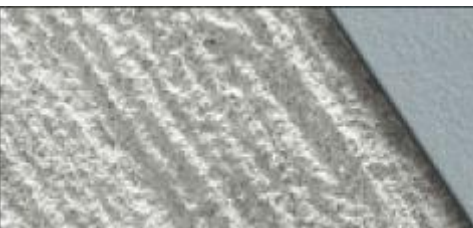

# ConAir® X

## Air Entraining Admixture for Concrete

### STORAGE

**ConAir® X** should be stored at temperatures above 35°F (2°C) degrees. Although freezing does not harm the performance of **ConAir® X**, precautions should be taken to protect it from freezing. If it should happen to freeze, thaw and reconstitute with mechanical agitation.

**Do Not Use Pressurized Air for Agitation.**

### PACKAGING:

55-gallon drums, 275-gallon totes, and bulk tank truck

Premiere Concrete Admixtures warrants its products to be free from defects in material and manufacture. There are no other warranties by Premiere Concrete Admixtures of any nature whatsoever, expressed or implied. This information is based on data and knowledge believed to be true and accurate at time of publication and is offered as a resource for the users of our products. Premiere Concrete Admixtures assumes no liability in the use of this information and does not warranty the results obtained for any application. Premiere Concrete Admixtures shall not be liable for damages of any sort, the use or results of this product and shall not be responsible for conditions outside its control, including but not limited to, other materials, design, inspection, workmanship and field conditions. No statement, recommendation, or other information is intended to infringe on any patent or copyright held by others.

