

ConAir® VR

Vinsol Resin Air Entraining Admixture for Concrete

DESCRIPTION:

ConAir®-VR is specially formulated for use as an air entraining admixture for concrete. **ConAir®-VR** is manufactured under strict quality control standards to insure uniform performance at the job site.

ADVANTAGES:

ConAir®-VR introduces millions of uniformly sized and spaced air voids throughout the concrete mixture. Concrete containing these tiny air bubbles has been proven far more resistant to freezing and thawing than plain concrete.


ConAir®-VR in hardened concrete reduces permeability and enhances the resistance to surface deterioration caused by de-icing chemicals.

Concrete containing **ConAir®-VR** requires less water; therefore, bleeding is reduced. Entrained air bubbles act as “ball-bearings” to greatly improve the plasticity and workability of the concrete, making it easier to flow into forms or be pumped into place.

Concrete mixes designed using **ConAir®-VR** result in a reduction of segregation and honeycombing with smoother and more even finished surfaces

COMPATIBILITY:

ConAir®-VR is fully effective and compatible in concrete containing all types of portland cement, class C and F fly ash, microsilica, calcium chloride, fibers and approved water-reducing, accelerating and retarding admixtures. **ConAir®-VR** can be used in all white, colored, and architectural concrete. For best results, the air entrainment should be dispensed separately into the mix with the initial batch water or on damp, fine aggregate

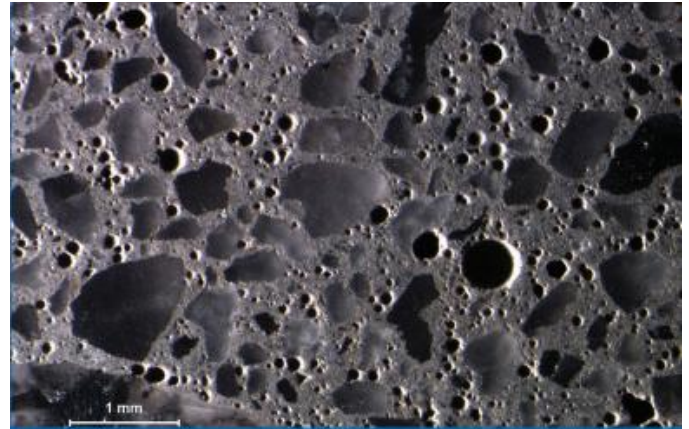

DOSAGE RATE:

There is no standard addition rate for **ConAir®-VR**. The amount to be used will vary with local materials and intended concrete performance requirements, usually in the range of 4% to 6%. Typical **ConAir®-VR** addition rates range from .2 to 3 ounces per 100 pounds (13 to 195 ml per 100 kg) of cement.

SPECIFICATIONS:

Conforms to ASTM C260 AASHTO M 154 CRD C 13

TECHNICAL NOTE:

ConAir®-VR does not contain calcium chloride or any chloride based components. It will not promote or contribute to corrosion of reinforcing steel in concrete.



ConAir® VR

Vinsol Resin Air Entraining Admixture for Concrete

STORAGE

ConAir®-VR should be stored at temperatures above 35°F (2°C) degrees. Although freezing does not harm the performance of **ConAir®-VR**, precautions should be taken to protect it from freezing. If it should happen to freeze, thaw and reconstitute with mechanical agitation.

Do Not Use Pressurized Air for Agitation

PACKAGING:

55-gallon drums, 275-gallon totes, and bulk tank truck

Premiere Concrete Admixtures warrants its products to be free from defects in material and manufacture. There are no other warranties by Premiere Concrete Admixtures of any nature whatsoever, expressed or implied. This information is based on data and knowledge believed to be true and accurate at time of publication and is offered as a resource for the users of our products. Premiere Concrete Admixtures assumes no liability in the use of this information and does not warranty the results obtained for any application. Premiere Concrete Admixtures shall not be liable for damages of any sort, the use or results of this product and shall not be responsible for conditions outside its control, including but not limited to, other materials, design, inspection, workmanship and field conditions. No statement, recommendation, or other information is intended to infringe on any patent or copyright held by others.

