

EcoFlo® SCM-N

Mid-Range Water-Reducing Admixture for High Volume Fly Ash Concrete

DESCRIPTION:

EcoFlo® SCM-N is a high performance chemical admixture using innovative chemical engineering to provide the means to produce high volume fly ash concrete offering normal setting characteristics, improved workability and finishability and strength development similar to lower ash content mixes.

EcoFlo® SCM-N is manufactured under rigid quality control measures to provide uniform, reliable results.


USES:

EcoFlo® SCM-N is recommended for all concrete mixes where significant water reduction, improved cementitious material performance (more psi/lb), normal to accelerated set times and enhanced finishing characteristics are desirable. **EcoFlo® SCM-N** is especially effective in improving the performance of concrete mixes containing high volumes of fly ash and other pozzolans.

ADVANTAGES:

- Allows better utilization of mixes incorporating high volumes of pozzolans such as fly ash, and GGBFS
- Provides increased slump and flowability without increased water content
- Improves concrete quality by reducing the water-cement ratio for a given degree of workability
- Proprietary finishing aid improves workability and finishability
- Hydration catalysts accelerate concrete set and boosts early strength
- Reduces cracking and shrinkage
- Improves concrete chemical resistance and durability
- Improves cementitious material performance (more psi/lb)

Field results at a 6.5" slump

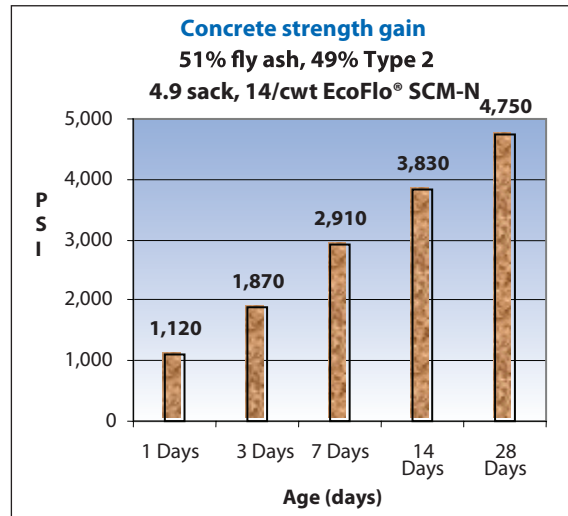

DOSAGE RATE:

EcoFlo® SCM-N is recommended for use at a dosage rate of 5 to 16 fluid ounces per 100 pounds (586 to 1040 ml per 100 kg) of cement.

Because local job conditions vary, please contact your local Premiere Concrete Solutions Specialist for further assistance if using outside recommended dosage ranges.

SPECIFICATIONS:

Conforms to ASTM C 494 type A
AASHTO M 194 Type A
CRD C 87 Type A

EcoFlo® SCM-N

TECHNICAL NOTE:

EcoFlo® SCM-N is a chemically stable brown liquid with a pH>7.0 and weighs approx. 10 lb./gal.

EcoFlo® SCM-N does not contain any purposely added calcium chloride or other chloride based components. It will not promote or contribute to corrosion of reinforcing steel in concrete.

STORAGE:

EcoFlo® SCM-N may freeze at temperatures below 33°F (2°C). Although freezing does not harm **EcoFlo® SCM-N**, precautions should be taken to protect it from freezing. If **EcoFlo® SCM-N** should happen to freeze, thaw and reconstitute with mechanical agitation.

COMPATIBILITY:

EcoFlo® SCM-N is compatible with all types of Portland cement, class C and F fly ash, slag, microsilica, calcium chloride, fibers and approved air entraining, accelerating, retarding, and super plasticizing admixtures.

EcoFlo® SCM-N can be used in all white, colored, and architectural concrete. For best results, each admixture must be dispensed separately into the concrete mix.

Do Not Use Pressurized Air For Agitation.

PACKAGING:

55-gallon drums and bulk deliveries.

Premiere Concrete Admixtures warrants its products to be free from defects in material and manufacture. There are no other warranties by Premiere Concrete Admixtures of any nature whatsoever, expressed or implied. This information is based on data and knowledge believed to be true and accurate at time of publication and is offered as a resource for the users of our products. Premiere Concrete Admixtures assumes no liability in the use of this information and does not warranty the results obtained for any application. Premiere Concrete Admixtures shall not be liable for damages of any sort, the use or results of this product and shall not be responsible for conditions outside its control, including but not limited to, other materials, design, inspection, workmanship and field conditions. No statement, recommendation, or other information is intended to infringe on any patent or copyright held by others.

